

6313 & 6314 2.4GHz Transmitter & Receiver

herga

Technology Ltd

- Wireless controls operating on 2.4GHz ,16 channels
- 1-10 buttons
- Momentary switches as standard, latching available on request
- 5 or 11 relay 12/24V DC receivers (IP66)
- Standard range 30-40 metres
- Simple pairing set up
- Additional transmitters can be connected to 1 receiver
- Operates with standard AAA batteries (Handsets A & B)
Rechargeable li-ion (Handset C)
- Operating Temperature -20°C to +55°C
- Transmitters rated IP66/7
- Customised overlays available for OEMs



Handset design



Handset A

Handset B
3 button

Handset B
6 button

Handset B
10 button

Handset C

Ordering information

Transmitter

6313 - Z -

Handset Style:

A
B
C

Number of Buttons:

3
6
8
10

Operating Mode:

A = Continuous mode
B = Discontinuous mode
(Unavailable for Handset C)

ALCYON

ÉLECTRONIQUE

RD 11 – BP20 – 78650 Beynes – France
Tel : +33 (0) 134 947 700

info@alcyonelectronique.fr

Fax : +33 (0) 134 875 340
www.alcyonelectronique.fr



6313 & 6314 2.4GHz Transmitter & Receiver

herga

Technology Ltd

Ordering information

Receiver

6314 -

Relays:

A = 5 Relay
B = 11 Relay

Programming Mode:

A = Continuous mode, Interlocking switches, Momentary action
B = Continuous mode, Non - Interlocking switches, Momentary action
C = Discontinuous mode, Interlocking switches, Momentary action
D = Discontinuous mode, Non-Interlocking switches, Momentary action

Definitions:

In discontinuous mode the handcontrol only transmits when a button is pressed whereas in continuous mode the handcontrol constantly transmits while it is turned on.


Use of continuous mode allows the receiver to always be aware of the status of the handcontrol which can enable the use of more advanced features.

Interlocking - Allows only one button to be switched at any one time.




Reference dimension


Handset A

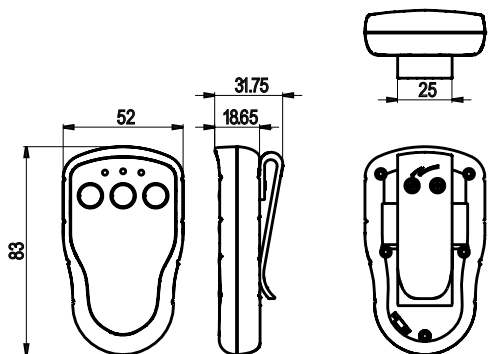

Handset B

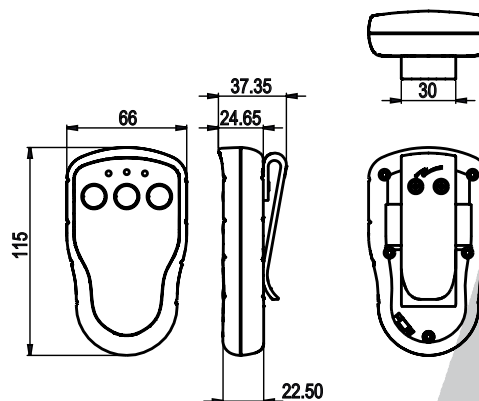

Handset C

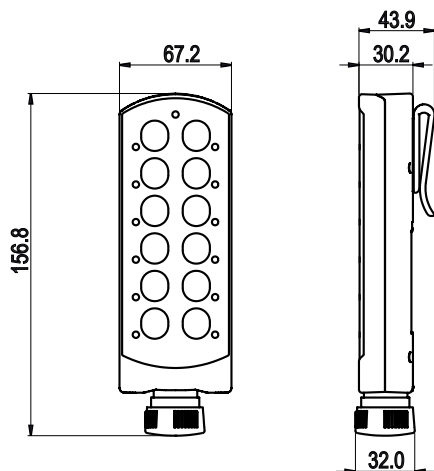

Control Box

