



WECO® HAMMER UNION TEMPERATURE TRANSDUCER

MODEL 271 / 371

FEATURES:

- 2" - 1502, 2002 or 2202 WECO® Sizes
- Rated to 22,500 PSI (1,551 BAR)
- Corrosion resistant materials
- 0 to 5 Vdc or 4-20 mA outputs
- Calibrated temperature range from -40 °F (-40 °C) up to +250 °F (+121 °C)

APPLICATIONS:

- Drilling and well servicing
- Choke and kill operations
- Hydraulic fracturing

PRODUCT OVERVIEW:

GP:50 Model 71 series is specifically designed to provide accurate temperature measurement in a WECO® union configuration. Optional WECO® union sizes, electrical connections and RTD, 0 to 5 Vdc or 4-20 mA outputs available.

FIELD OPTIONS:

- Optional electrical connections
- Inconel wetted parts
- Digital outputs RS232, CANbus or RS485
- ATEX Intrinsically Safe Approval



Model 271 / 371
WECO® "Hammer" Union
Temperature Transducer

Current Approval:




Pending Approval:



GP:50 MODEL 271 / 371

DIMENSIONAL DRAWING

All dimensions are in inches (mm)

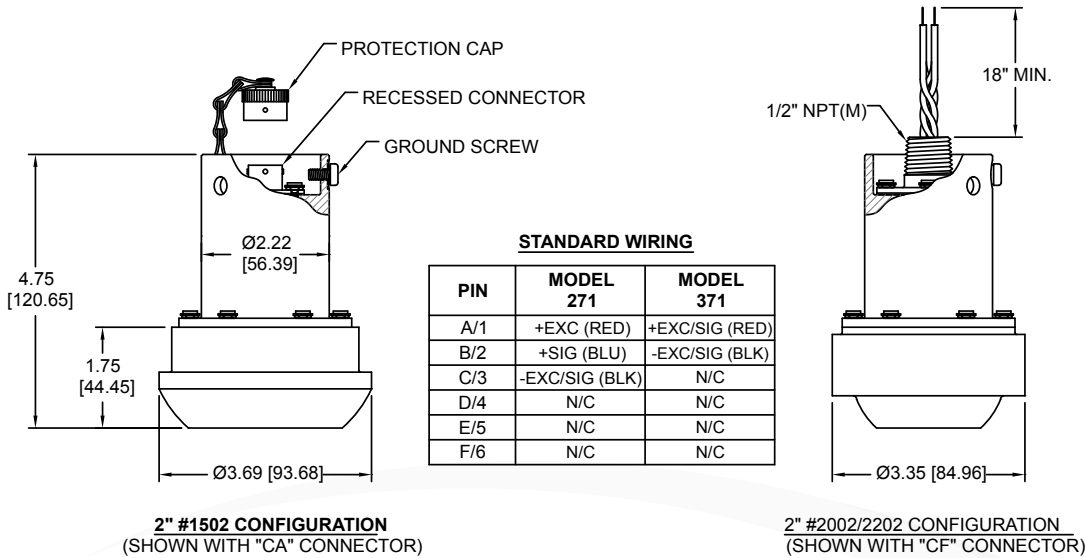

REFERENCE SPECIFICATIONS

ELECTRICAL	ACCURACY
<ul style="list-style-type: none"> Supply Voltage: (Model 271) 9 to 36 Vdc (Model 371) 9 to 36 Vdc 	<ul style="list-style-type: none"> Standard: $\pm 3^\circ\text{F}$ ($\pm 1.41^\circ\text{C}$) Zero Balance (@ 70 °F): $\pm 0.5\%$ FSO
<ul style="list-style-type: none"> Output Signal: (Model 271) 0 to 5 Vdc (Model 371) 4-20 mA 	CALIBRATED TEMPERATURE RANGES 0 °F to +250 °F (-18 °C to +121 °C) -40 °F to +250 °F (-40 °C to +121 °C)
<ul style="list-style-type: none"> Insulation Resistance: (Model 271 & 371) $\geq 100\text{ M}\Omega$ at 50 Vdc Connection: Bendix PTO2E-10-6P 	APPROVALS (370 SERIES ONLY, OTHERS PENDING) Currently Available: <ul style="list-style-type: none"> ATEX/IEC Intrinsically Safe: II 1 G Ex ia IIC T5 Ga ATEX Zone 2: II 3 G Ex nA/ic IIC T5 Gc Pending: <ul style="list-style-type: none"> IEC Zone 2: II 3 G Ex nA/ic IIC T5 Gc FM/CSA: Intrinsically Safe: Class I, Division 1, Groups A-G, T5, Ex ia IIC T5 FM/CSA: Division/ Zone 2: Class I Division 2, Groups A-G, T5, Ex nC/nA/nL T5
MATERIALS OF CONSTRUCTION <ul style="list-style-type: none"> Sensor: 17-4 PH stainless steel Housing: 300 series stainless steel 	
MECHANICAL <ul style="list-style-type: none"> Process Connection: 2" 1502, 2002 or 2202 WECO® Maximum Operating Pressure: 22,500 PSI (1,551 BAR) Approximate weight: <5 lbs (2.3 kg) 	

**Standard configurations shown.
Please consult factory for other options.**

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact GP:50 for assistance with your application.

WECO® is a federally registered trademark of FMC Technologies

© 2014 GP:50 NY Ltd. | 2770 Long Rd, Grand Island, NY 14072 USA

Tel: +1.716.773.9300 Fax: +1.716.773.5019 Email: sales@gp50.com Web: www.gp50.com

