

6244 Haptic Puck Switch





herga

Technology Ltd

- High mechanical stability
- Easy to clean
- Haptic feedback in the form of an audible “click” when pressed
- Can be integrated into Herga’s 2017 modular footswitch range
- Can be fitted into an external system
- Designed in line with medical standards
- Made with UL approved materials



Reference dimensions mm

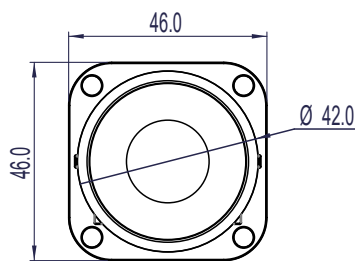

Panel hole not to exceed \varnothing 37.00



General specifications

Standards/ Approvals	Micro switch UL/cUL/ENEC15
Degree of protection	Panel Sealed to IP67 (in situ)
Connection method	Soldered cable
Micro switch Electrical Rating	0.1A 125/250V AC, 0.1A 30V DC
Contact Configuration	SPDT/ DPDT Momentary

Operating temperature range	-10°C to +60°C
Body material	Acetal Copolymer
Bellows material	PVC Bellows
Weight	25g
Average mechanical life	1 x 10 ⁶ (dependent on application)
Additional information	Standard black bellows Additional colours on request Designed to meet IEC 60601-1

Ordering Options

6244 - CC	SPDT CONTACTS, BLACK	MOMENTARY ACTION
6244 - DC	DPDT CONTACTS, BLACK	MOMENTARY ACTION

Stock model : 6244-CC

ALCYON

ÉLECTRONIQUE

RD 11 – BP20 – 78650 Beynes – France

Tel : +33 (0) 134 947 700

info@alcyonelectronique.fr

Fax : +33 (0) 134 875 340

www.alcyonelectronique.fr

Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice

