


THREAD SIZE	C		D max	M		RECOM. CLEAR. HOLE		DEPTH	
	min.	max.		Driver Size	Ref.	min.	max.	min.	max.
2-56 UNC-2A	0.171	0.181	0.062	#T9	0.081	0.091	0.095	0.036	0.054
4-40 UNC-2A	0.223	0.238	0.080	#T9	0.081	0.125	0.129	0.050	0.075
6-32 UNC-2A	0.275	0.294	0.097	#T10	0.132	0.147	0.152	0.063	0.094
8-32 UNC-2A	0.326	0.347	0.115	#T15	0.132	0.173	0.179	0.063	0.094
10-24 UNC-2A	0.378	0.403	0.133	#T20	0.155	0.199	0.204	0.083	0.125
10-32 UNF-2A	0.378	0.403	0.133	#T20	0.155	0.199	0.204	0.083	0.125

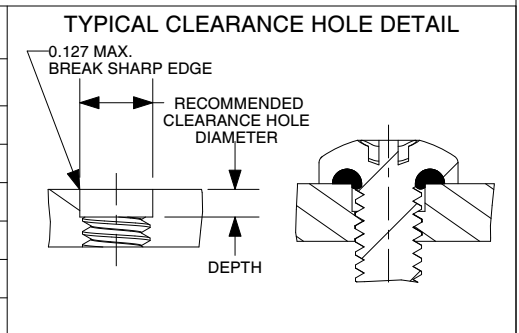

NOTES:

- ALL DIMENSIONS IN INCHES.
- TOLERANCE: PER ASME/ANSI B18.6.3

STANDARD SPECIFICATIONS & COMMON OPTIONS (HOW TO ORDER)

STD. SCREW MATERIAL: TYPE 18/8 STAINLESS STEEL PER DFARS (OTHER MATERIALS AVAILABLE)
 STD. SCREW FINISH: NATURAL (PASSIVATED PER AMS2700 UNLESS OTHERWISE SPECIFIED)
 STD. O-RING MATERIAL: SILICONE RUBBER (SEE TABLE FOR O-RING OPTIONS)
 REACH & RoHS COMPLIANT

SAMPLE CATALOG NO.		AVAILABLE O-RING MATERIALS			COMMON OPTIONS	
SCREW TYPE	LBP	Compound Suffix	Material	Service Temp.	SUFFIX	DESCRIPTION
THREAD	2-56	-2701	Silicone Rubber	-150° F to 500° F -101° C to 260° C	-BLKOX	BLACK OXIDE PER MIL-C-13924, CLASS 4
LENGTH	3/16	-2615	FluoroSilicone Rubber	-78° F to 450° F -61° C to 232° C	-NY	LOCKING NYLON PELLET
O-RING SUFFIX	-2701	-5701	Viton A	-20° F to 400° F -29° C to 204° C	-LY	LOCKING NYLON STRIP
OPTIONS	-BLKOX	-4601	Buna N (NBR)	-65° F to 250° F -54° C to 121° C	-TP	LOCKING NYLON STD. PATCH
		-3701	Neoprene (EPR)	-65° F to 300° F -54° C to 149° C	-HTP	HIGH TEMP. LOCKING NYLON PATCH
		-7601	Ethylene Propylene (EPDM)	-65° F to 300° F -54° C to 149° C		

A	ECO-19-0008: ADDED 4-40 INSTANCE	DWN: DAN LAW	CHKD: FK 03.11.19	03.05.19
REV.	DESCRIPTION			DATE

TOLERANCES
 UNLESS OTHERWISE NOTED
 .X ±0.1 .XXX ±0.005
 .XX ±0.01 < ±1.0°
 RUBBER: RMA "A3" COMMERCIAL

MAT'L:
 SEE SPECIFICATIONS & COMMON OPTIONS

FINISH:
 SEE SPECIFICATIONS & COMMON OPTIONS

TITLE:
**SEELSKREW® , PAN HEAD,
 6-LOBE DRIVE w/ SECURITY PIN**

ALCYON
 ÉLECTRONIQUE

Tel : +33 (0) 1 34 94 77 00
<https://alcyonelectronique.fr/>