




| PTC Condensate Evaporator             | DUV 160                  |     | DUV 200 |     |
|---------------------------------------|--------------------------|-----|---------|-----|
|                                       | Operating Power max. (W) | 135 | 160     | 165 |
| Operating Voltage 50/60 Hz   ±10% (V) | 110                      | 230 | 110     | 230 |
| Evaporation rate max. (ml/h)          | 150                      | 200 | 190     | 245 |
| Capacity (ml)                         | 350                      |     |         |     |
| Dry run power consumption approx. (W) | 52                       | 56  | 52      | 56  |
| Inrush current max. (A)               | 2,5                      | 5,5 | 3,5     | 7,5 |
| Operating temperature (°C)            | 0 to +40                 |     |         |     |
| Storage temperature (°C)              | -20 to +70               |     |         |     |
| Cable length (mm)                     | 400                      |     |         |     |
| Protection degree                     | IP 20                    |     |         |     |
| Protection class                      | II                       |     |         |     |



## FEATURES

- Compact PTC Condensate Evaporator with integrated tank for automatic collection and evaporation of condensate in enclosures and electrical cabinets
- Power from 135 to 200W
- Can be operated at 110V or 230V
- Evaporation rate up to 245ml/h
- High safety and energy efficiency thanks to the PTC effect
- Compact, encapsulated design
- Maintenance-free, no draining necessary
- Enclosed housing with integrated condensate collection tank
- Easy installation through hose connection, mounting brackets, DIN clip

## DRAWING

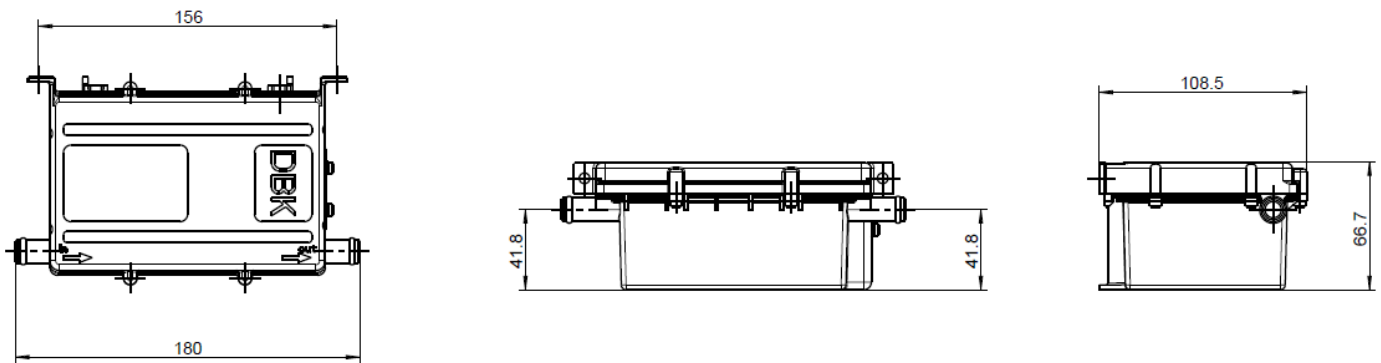

PTC Condensate Evaporator

## APPLICATIONS

- Evaporator in enclosures and electrical cabinets
- Evaporator in refrigerated counters, freezers and air conditioners
- Air conditioners, Air-conditioned cabinets