


| THREAD CODE | THREAD SIZE | F. max. | H | | T | D |
|-------------|-------------|---------|-------|-------|------|-------|
| | | | MIN. | MAX. | | |
| M3 | M3x0.5 | 5.50 | 2.15 | 2.40 | 0.25 | 4.00 |
| M3.5 | M3.5x0.6 | 6.00 | 2.50 | 2.80 | 0.25 | 4.50 |
| M4 | M4x0.7 | 7.00 | 2.90 | 3.20 | 0.33 | 5.50 |
| M5 | M5x0.8 | 8.00 | 3.70 | 4.00 | 0.41 | 6.00 |
| M6x.75 | M6x.75 | 10.00 | 4.67 | 5.00 | 0.51 | 7.70 |
| M6 | M6x1 | 10.00 | 4.67 | 5.00 | 0.51 | 7.70 |
| M7 | M7x0.75 | 11.00 | 5.22 | 5.50 | 0.51 | 8.00 |
| M8x1.0 | M8x1.0 | 13.00 | 6.22 | 6.50 | 0.63 | 10.00 |
| M8 | M8x1.25 | 13.00 | 6.22 | 6.50 | 0.63 | 10.00 |
| M10 | M10x1.5 | 17.00 | 7.72 | 8.00 | 0.66 | 12.70 |
| M12x1 | M12x1 | 19.00 | 9.22 | 9.50 | 0.86 | 14.50 |
| M12 | M12x1.75 | 19.00 | 9.22 | 9.50 | 0.86 | 14.50 |
| M14 | M14x2 | 22.00 | 10.72 | 11.00 | 1.01 | 17.00 |
| M16 | M16x2 | 24.00 | 12.72 | 13.00 | 1.01 | 18.00 |
| M18 | M18x2 | 27.00 | 14.72 | 15.00 | 1.27 | 20.00 |
| M20x1.5 | M20x1.5 | 30.00 | 15.72 | 16.00 | 1.27 | 21.50 |
| M20 | M20x2.5 | 30.00 | 15.72 | 16.00 | 1.27 | 21.50 |
| M24 | M24x3 | 36.00 | 18.00 | 19.50 | 1.27 | 27.00 |
| M27 | M27x3 | 41.00 | 20.50 | 22.00 | 1.27 | 30.00 |
| M30 | M30x3.5 | 46.00 | 23.00 | 24.00 | 1.27 | 33.00 |

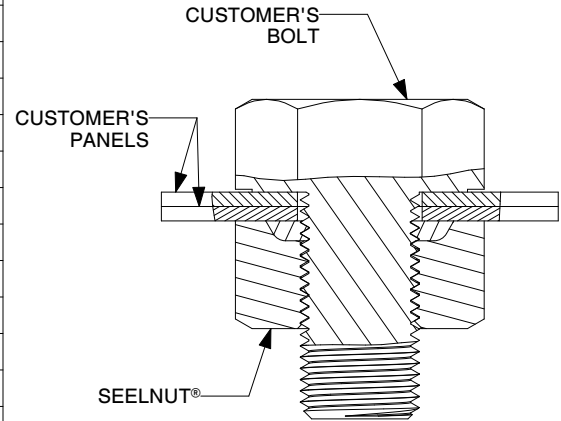

NOTES:

1. DIMENSIONS ARE IN MILLIMETERS.
2. TOLERANCE: PER ISO 4032 (UNLESS OTHERWISE SPECIFIED)

| HOW TO ORDER | | |
|-----------------------|-----------------|------------------------|
| SAMPLE CATALOG NO. | M6 AJ6 SS BLKOX | |
| THREAD CODE | M6 | ENTER FROM TABLE ABOVE |
| | AJ | |
| SEALING MATERIAL CODE | 6 | ENTER FROM TABLE |
| NUT MATERIAL CODE | SS | ENTER FROM TABLE |
| NUT FINISH CODE | BLKOX | ENTER FROM TABLE |

| AVAILABLE SEALING MATERIALS | |
|-----------------------------|---------------------------|
| Code | Description |
| 6 | Silicone |
| 5 | FluoroSilicone |
| 43 | Buna N (NBR) |
| 11 | Neoprene (EPR) |
| 9 | Ethylene Propylene (EPDM) |
| 8 | FKM 70 DURO |

| AVAILABLE NUT MATERIALS | |
|-------------------------|---|
| Code | Description |
| NONE | 12L14 Steel Zinc plated per clear per ASTM B633 type III, SC1, RoHS COMPLIANT |
| SS | 303/304 Stainless Steel |
| BN | Nickel Plated Brass |

| AVAILABLE NUT FINISH | |
|----------------------|--------------------------------------|
| Code | Description |
| BLKOX | BLACK OXIDE PER MIL-C-13924, CLASS 4 |

| | | | | |
|------|--|--------------|-------------|----------|
| C | ADDED INSTANCE M8x1.0, ADDED FKM 70 MAT'L. | DWN: DAN LAW | CHKD: FK | 08.03.18 |
| B | ECO-16-0053: ADDED THE FINISH CODE TABLE AND UPDATED FORMAT. | DWN: DAN LAW | CHKD: KF/FK | 10.06.16 |
| REV. | DESCRIPTION | | | DATE |

| | | | | |
|---|---|-------|----------|----------|
| TOLERANCES UNLESS OTHERWISE NOTED .X ±0.1 .XXX ±0.005 .XX ±0.01 < ±1.0° RUBBER: RMA "A3" COMMERCIAL | TITLE: SEELNUT® METRIC | ENG. | S. GOK | 05.05.11 |
| | | DWN. | S. GOK | 05.05.11 |
| | | CHKD. | J. DODA | 05.05.11 |
| MAT'L: SEE SPECIFICATIONS & OPTIONS FINISH: SEE SPECIFICATIONS & OPTIONS | | SCALE | DWG. NO. | |
| | | NTS | 3100/1 M | |

THIS DRAWING IS THE PROPERTY OF APM HEXSEAL CORPORATION AND INCLUDES PROPRIETARY INFORMATION. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF APM HEXSEAL CORPORATION.