

70CP SERIES | CERAMIC CAPACITIVE PRESSURE SENSOR

6 to 30 VDC Supply, 4 to 20 mA or Voltage Output

Description

The 70CP series pressure sensors are ideally suited for environmentally demanding OEM industrial applications. This series accommodates a wide range of input voltages (6 to 30 VDC) and provides several output options, including 4 to 20 mA. Housed in stainless steel, plated steel or brass, the 70CP series offers performance and economy.

Sensata Technologies has been a leading global supplier of pressure sensors and switches for over 50 years.



Features

- Enhanced accuracy over wide operating range
- Housing options are compatible with most media
- EMC protection to 100 V/m
- Broad operating temperature range (-40°C to 135°C)
- Exceptional shake and vibration tolerance
- Overvoltage and reverse polarity protection
- Small size and simple installation

Applications

- Compressors & pumps
- Hydraulics & pneumatics
- Agriculture & construction equipment
- Transportation & off-road vehicles
- Engine controls & monitors
- Alternative energy management
- Load management
- Process control & automation
- Medical
- Military




PERFORMANCE CHARACTERISTICS

Pressure Ranges	0 to 15, 50, 100, 150, 250, 500 psi 0 to 750 psi
Accuracy	±0.8% F.S. (linearity, hysteresis, repeatability and calibration)
Total Error Band	±1.5% F.S. (0°C to +85°C)
Operating Temperature	-40°C to +125°C
Storage Temperature	-40°C to +150°C
Proof Pressure	5X 15 to 75 psi, 3X 100 to 250 psi, 2X 500 psi, 1.5X 750psi
Burst Pressure	1700 psi
Cycle Life	15 to 500 psi = 10M F.S. cycles 750 psi = 5M F.S. cycles
Random Vibration	10g (50 to 2000 Hz)

Mechanical Shock	100g (6 Hz, ½ sine)
Drop (any Axis)	1.5m
Supply Voltage	6 to 30 VDC
Output	Current Output: 4 to 20 mA Voltage Output: 1 to 4 VDC or 1 to 4.9 VDC
Output Load, Voltage Current	10K ohms
Output Load, Current Current	$(V_s^* - 6) / 0.02$ ohms
Overvoltage Protection	40 VDC
Reverse Voltage Protection	-40 VDC
Output Response Time	10mS max
Short Circuit Protected	Yes
EMC (512 MHz to 1GHz)	100 V/m
EMC (1MHz to 512 MHz)	50 V/m
4 to 20 mA Version	30 V/m
ESD (CDF-AEC-Q100-002)	15 kV

DIMENSIONAL DRAWINGS (71CP03 & 77CP02)

Dimensions in mm [Inch]

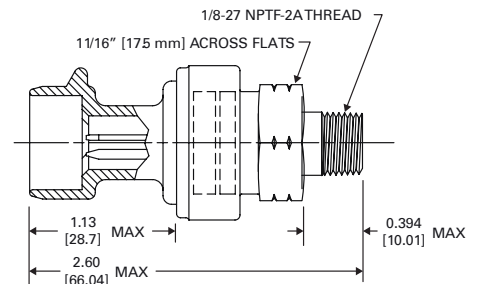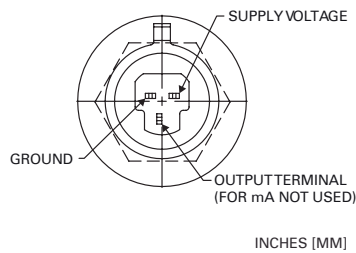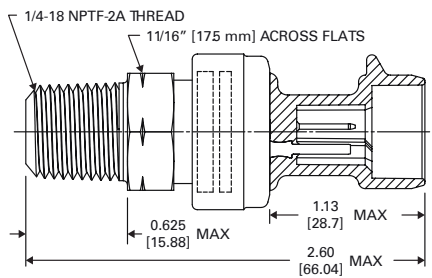

AGENCY APPROVALS & CERTIFICATES






ORDERING OPTIONS

Example : 71CP 02 5 0100 G F A F A C

Stainless Steel, 1/8" NPTF-2A Male, Packard Metri-Pack™, Vented Gage, Fluorosilicone, 4 to 20 mA, Required for Air and Water Application

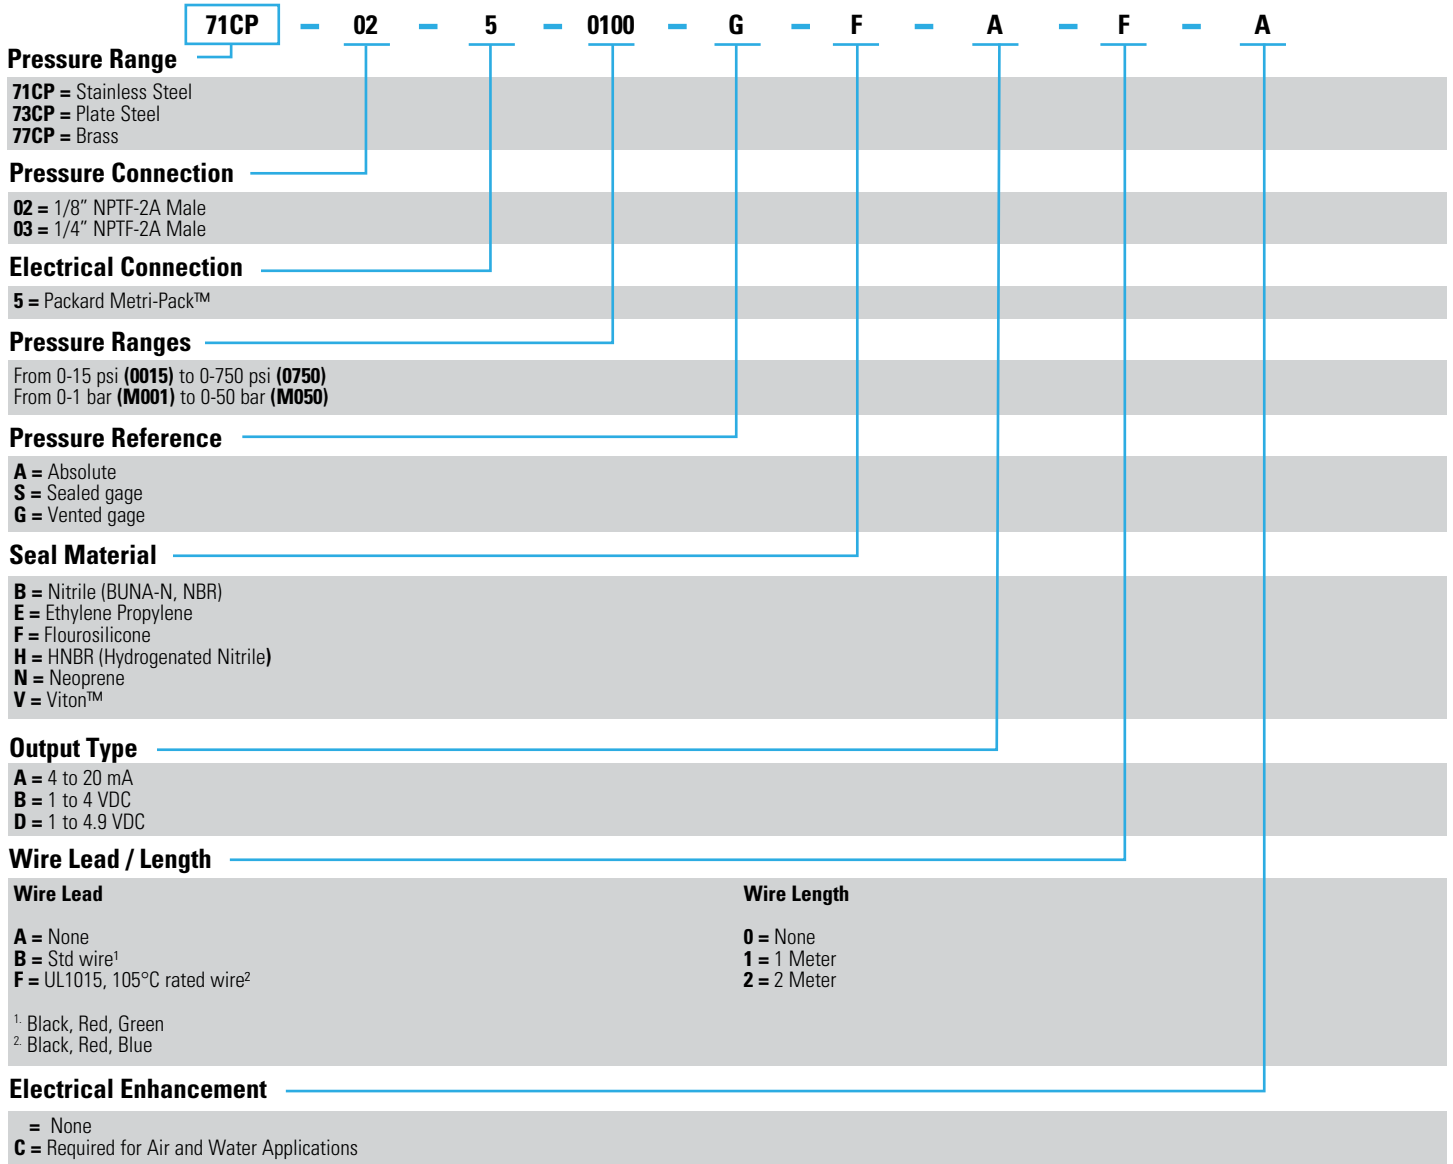

Seal Compatibility Guide

Seal Material	Media Compatibility	Max Seal Temperature Range
Nitrile (BUNA-N, NBR)	Petroleum oils, lubricants, detergent solutions, helium	-20°C to 100°C
HNBR (Hydrogenated Nitrile)	Petroleum oils, lubricants, detergent solutions	-20°C to +135°C
Ethylene Propylene	Steam, soaps, polar solvents, brake fluids, acetone, Skydrol™	-40°C to +135°C

Seal Material	Media Compatibility	Max Seal Temperature Range
Fluorosilicone	Chlorinated solvents, oils, fuels, air	-40°C to +135°C
Neoprene	Refrigerants (freons/ammonia)	-40°C to +120°C
Fluorocarbon (Viton™)	Fertilizers, freons, butanes, oils, trichlorethylene	-35°C to +135°C

Revised 02/06/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727

sensors@sensata.com

switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826

pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006
ext 2808