



| P255

Stainless Steel Pressure Transducer

The model P255 is based on Kavlico's fieldproven ceramic capacitive technology with the latest state-of-the-art ASIC. Featuring a 316SS housing, the P255 is designed for general use wherever a rugged and reliable pressure transducer is required. The P255 package has a built-in Metri-Pack 150, electrical connector and supports popular process connection threads. The P255 is offered with a variety of seal materials and is suitable for many diverse applications. Specifically intended for OEM applications, the P255 delivers a cost effective solution without compromising performance or reliability.



Features

- Dry Media *1
 - Superior Long Term Stability
 - Excellent Repeatability/Hysteresis
 - Superior EMI/RFI Rejection
 - Low Power Consumption
 - Linear Output
 - Temperature Compensated
 - Over-Voltage, Reverse Polarity & Short Circuit Protection
 - Ten Million Cycle Life Expectancy
 - Outstanding Shock & Vibration Performance
- 1. For wet conductive media please contact us*

Applications

- Steam Sterilizers
- Gasoline & Diesel Engines
- Natural Gas & CNG Engines
- Agricultural Chemical Equipment
- Level Measurement
- Test Equipment
- Injection Molding
- Coolant Pressure
- Industrial Compressors

● MAIN FEATURES

Pressure Ranges	0 to 15 up to 0 to 1000 PSI
Electrical Connection	Packard Electric Metri-Pack 150 Series
Pressure Connection	1/4-18 NPT (external), 3/8-24 UNF-2A (male)*1
Housing Material	316 Stainless Steel
Output Signal	0.5 - 4.5 VDC

1. for more options see how to order

SPECIFICATIONS

Pressure Ranges

from 0 to...	PSIA, PSIG, PSIS (gage)	15	1000
Proof Pressure (min)	PSI (gage)	75	2000
Burst Pressure Factor	PSI (gage)	100	2000

Physical

Operating Life Cycle	min. 10 million full pressure cycles over the full range
Vibration Resistance	10 G's peak to peak sinusoidal (10 to 2000 Hz)
Shock Resistance	75 G's ½ sinewave
Drop Test	1 meter drop on concrete as per SAE J1455 / DIN EN 60068-2-3-1
Weight	≤ 100 grams (without mating connector)
Ingress Protection	IP67 - depending on electrical connector
Operating Temperature	-40°C to 125°C (depending on seal material) *2
Storage Temperature	-40°C to + 125°C (depending on seal material) *2
Media	All class II fluids and gases compatible with stainless steel 3/6 and the internal seal ring material

2. for more details see Ordering Options

Performance

Total error band *3	+/-2% of span (-20 ≤ T ≤ 100° C) +/-3% of span (T < -20° C, T < 100° C)
Stability coefficient	+/-0.5 % of full span over 1 year
Temp. Coefficients - Zero	0.2 % of span / 10 K within temperature range 0°C to + 80°C.2 %
Temp. Coefficients - Span	0.2 % of span / 10 K within temperature range 0°C to + 80°C.2 %

3. Including non-linearity, hysteresis, non-repeatability, zero point and full scale error (corresponds to error of measurement per IEC 61298-2). Adjusted in vertical mounting position with pressure port down

Electrical





Output Signal	0.5...4.5 VDC Ratiometric
Operating Supply Signal	5 VDC ± 10%
Power Consumption	≤ 25 mW
Overvoltage Protection	16 VDC
Short-circuit Proofness	Yes *4
Insulation Voltage	500 VDC
Reverse Polarity Protection	Yes *5
Load	≥ 25 kΩ
Response Time	15 ms max. to 63% of full scale pressure with step change on input

4. for min. 3 intervals at 5 minutes each


5. for min. 10 seconds on assigned pins

DIMENSIONS


Dimensions in mm [Inch]

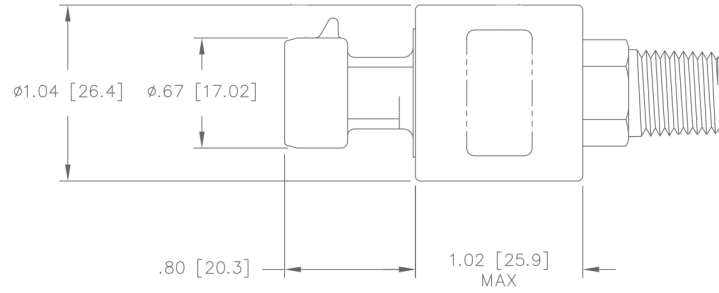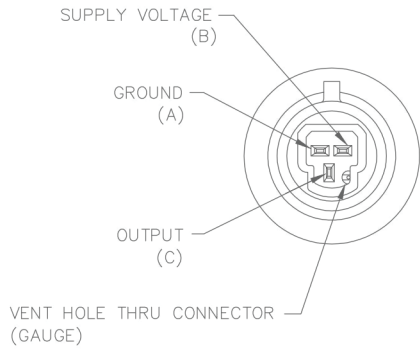


-1
1/4-18 NPT



-2
3/8-24UNF-2A
SUPPLIED WITH
O-RING



-3
3/8-24 UNF-2B
INTERNAL THREAD
O-RING BOSS PER
SAE J514



-4
1/8-27 NPT

ORDERING OPTIONS

Example: P255-15A-B1A

P255Sensor, 0 - 15 PSI, Nitrile Seal Material, 1/4 - 18 NPT Pressure Connection with Mating Connector

Family	P255	-	15	-	A	-	B	-	1	-	A
P255											
Pressure Ranges											
15	0 - 15										
1000	0 - 1000										
Reference											
A:	Absolute										
G:	Gage										
S:	Sealed Gauge (0 PSIS = 14.7 PSIA)										
Seal Material											
B:	Nitrile										
C:	Neoprene										
D:	Fluorocarbon										
E:	Fluorosilicone										
F:	Ethylene Propylene										
Pressure Connection (Port)											
1:	1/4 - 18 NPT (Male)										
2:	3/8 - 24 UNF-2A (Male)										
3:	3/8 - 24 UNF-2B (Female)										
4:	1/8 - 27 NPT (Male)										
Built-in Electrical Connector											
A:	Packard with Mating Connector										
C:	Packard without Mating Connector										

AGENCY APPROVALS & CERTIFICATIONS



2011/65/EU ROHS Directive

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (800) 350 2727
sensors@sensata.com
switches@sensata.com

Europe, Middle East & Africa

+359 (2) 809 1826
pressure-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117
 Korea +82 (31) 601 2004
 India +91 (80) 67920890
 Rest of Asia +886 (2) 27602006
 ext 2808