

Applications the Micro Switch can be used in: TAlarm devices, Home security, Time recorder, Air conditioner, Food processor, Juice maker, Lawnmowers, Mixer, Central water heater, industrial apparatus, Special forklifts, Special vehicles.

Model Name	UL - cUL - Certification	ENEC - Certification
VW1-P1	0.1RA 30VDC μ T55 1E4 0.1RA 125/250VAC μ T55 1E4	0.1A 30VDC μ T55 1E4 0.1A 125/250VAC μ T55 1E4
VW1-03	3RA 30VDC μ T55 1E4 3RA 125/250VAC μ T55 1E4	3A 30VDC μ T55 1E4 3A 125/250VAC μ T55 1E4
VW1-06	5RA 30VDC μ T55 1E4 6RA 125/250VAC μ T55 1E4	5A 30VDC μ T55 1E4 6A 125/250VAC μ T55 1E4
VW1-10	5RA 30VDC μ T55 1E4 10RA 125/250VAC μ T55 1E4	5A 30VDC μ T55 1E4 10A 125/250VAC μ T55 1E4



MODEL	Rating	D	J	L	S	H
VW1	0.1A	*	*	*	*	*
	3A	*	*	*	*	*
	6A	*	*	*	*	*
	10A 10(2)A				*	*

NOTE: The symbol "*" represents the result is accepted




Dimensions

Unless otherwise specified, a tolerance of $\pm 0.4\text{mm}$ applies to all dimensions.

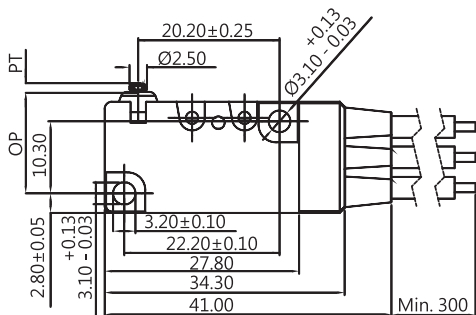

TERMINAL TYPES

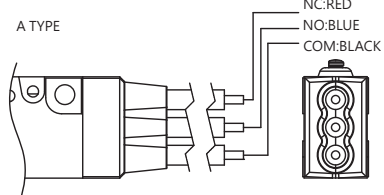



Ordering information

(Please use the characters in the chart below to create your product code)

Order Code VW1 - P1 - S Q - 00 A Q - D B 0011 - Z

Rating Current

10	10A 125/250VAC
06	6A 125/250VAC
03	3A 125/250VAC
P1	0.1A 125/250VAC

Operating Force

H	Heavier
S	Standard
L	Light
J	Slight
D	Lightness

Actuator Lever Fixed

0		
1		5
2		12.5

Actuator Type

00	No Lever
01	
02	
03	
04	
05	
06	

Circuit Arrangement

0	S.P.D.T.
1	S.P.S.T. NO
2	S.P.S.T. NC

AWG Type

C	16
D	18
E	20
F	22
G	24
H	26



Item	Rating Current	Operating Force	AWG Type	Leads Wire
1	P1	H, S, L, J, D	16, 18, 20, 22, 24, 26	Min. 30cm
2	03	H, S, L, J, D	16, 18, 20	Min. 30cm
3	06	H, S, L, J, D	16, 18	Min. 30cm
4	10	H, S	16	Min. 30cm