

15AM

MOTOR PROTECTOR/THERMAL CUT-OUT

As world market leader in appliance motor protection Sensata Technologies builds the 15AM motor protector to meet almost any application in this field. The 15AM is designed to provide locked rotor and overload protection in a wide variety of motors for industrial and domestic appliances. The 15AM is a leader in the European AC motor protection market.



Design & Operating Principals

In the 15AM design the nickel plated shell holds and protects the inner components against varnish penetration and mechanical forces. The heart of the device is the calibrated Klixon® bimetal disc, responding to current and temperature changes. It is supported by a slug and a contact welded on the disc. The fixed contact is placed on the opposite nickel-zinc coated plated steel shell, separated by a coated gasket for insulating and sealing. The 15AM can be supplied as a basic device with leads and other integrated quick connectors or automated connection systems. Customized lead configurations are available on request. The 15AM can be fitted in the best possible mounting location in combination with the optimum assembly operation. As the 15AM is a metal device it may be necessary to insulate the device from other conductive parts. An insulating sleeve is available on request.

The operating principle of the 15AM is both simple and effective. A current flows through the resistive Klixon® bimetal disc. When a fault condition occurs, the increased current and shell temperature heats up the bimetal disc which snaps and opens the contacts. As the device cools down to a safe temperature, the contacts will automatically reset.

Applications

The 15AM operates as an incorporated thermal sensitive protector in electric motors for pumps, washing machines, dish washers, dryers, vacuum cleaners, fans, battery chargers and microwave ovens.

SPECIFICATIONS

Standard Operating Temperature Range	from 65°C - 170°C
Tolerance on Open Temperature	± 5K
Maximum Ambient temperature	180°C
Maximum terminal temperature	185°C


Declarations

	Declarations to EN60730-1, EN60730-2-9	Declarations to EN60730-1, EN60730-2-22
Purpose of the Control	Thermal Cut-Out	Thermal Motorprotector
Construction	Incorporated, non-electronic	
Degree of Protection	IP00	
Terminals for Ext. Conductors	For internal conductors only	
Temperature Limits of the Switchhead	180°C	
PTI of Insulation Materials	PTI 250	PTI 250
Method of Mounting	Inserting, clamping, bracketing of the like	Inserting, clamping, bracketing of the like
Operating Time	For continuous operation	
Type of Action	Type 2B	Type 3C
Reset Characteristic	Automatic	Automatic
Extent of Sensing Element	Whole control	
Control Pollution Degree	Degree 2	Degree 2

Curves


Ultimate Trip Current vs. Ambient Temperature (non-circulating air)

Approx. to be used for selecting samples for verification on tests

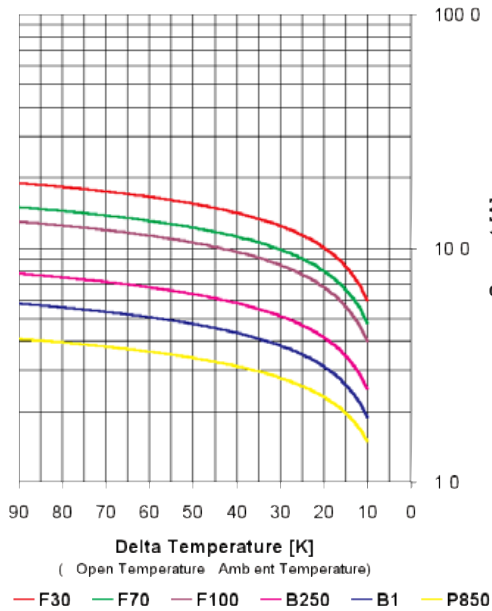


Average First Cycle Tripping Time vs. Current (ambient is 25°C)

Approx. to be used for selecting samples for verification on tests

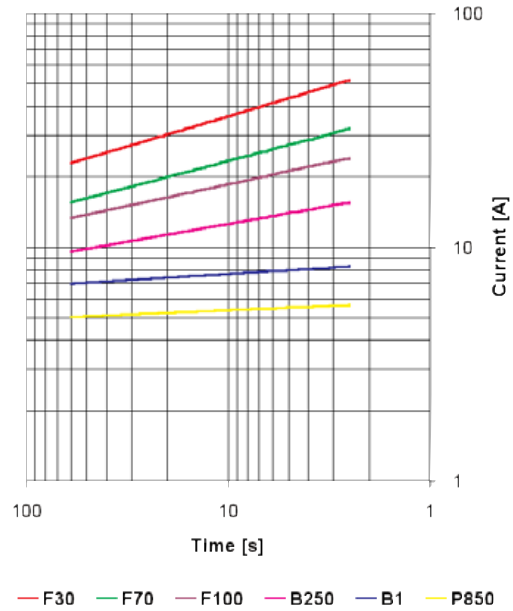

DIMENSIONS

All dimensions in are in millimeters.

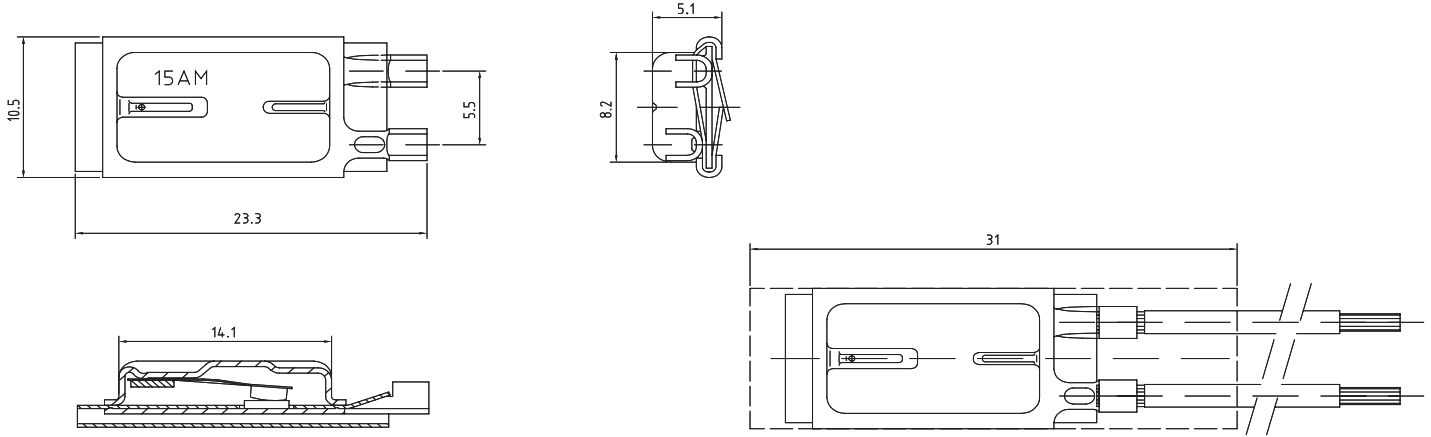

ORDERING OPTIONS

Example : 15AM 345 A 034 A

Product Series 15AM

Standard Opening Temperature 345
See Chart A.

Sealing A
A = Standard
B = Hotmelt Sealed

Standard Lead Coding 034
See Chart B.

Sleeve Coding A
A = Standard
= No Sleeve

A. Standard Opening Temperature

Specific Bimetal Resistivity		30		70		100		250		500		850	
Nominal Differential**		20 K	45 K	20 K	45 K	20 K	45 K	20 K	45 K	20 K	45 K	20 K	45 K
Opening Temp*	65°C	006		305		007		008		009			
	70°C	011		310		012		013		014			
	75°C	016		315		017		018		019			
	80°C	021		320		022		023		024			
	85°C	026		325		027		028		029			
	90°C	036		335		037		038		039			
	95°C	046		345		047		048		049		050	
	100°C	056	061	355	360	057	062	058	063	059	064	060	065
	105°C	071	076	370	375	072	077	073	078	074	079	075	080
	110°C	086	091	385	390	087	092	088	093	089	094	090	095
	115°C		106		405		107		108		109		110
	120°C		121		420		122		123		124		125
	125°C		136		435		137		138		139		140
	130°C		151		450		152		153		154		155
	135°C		166		465		167		168		169		170
	140°C		181		480		182		183		184		185
	145°C		196		495		197		198		199		200
	150°C		211		510		212		213		214		215
	155°C				520		222		223		224		
160°C				530		232		233		234			
165°C				540		242		243		244			
170°C				550		252		253		254			

* Opening temperature tolerance ± 5K
 ** Nominal differential equals nominal opening temp. minus nominal closing temp.
 Tolerance on closing temperature: 20K differential ± 10K
 45K differential ± 15K

B. Standard Lead Coding

Length (mm)	Code
55	031
60	032
65	033
70	034
75	035
80	036
90	037
100	038

Length (mm)	Code
110	039
125	040
140	041
160	042
180	043
210	044
240	045
Others on request.	

AGENCY APPROVALS & CERTIFICATIONS



Agency	File Number	Standard	Rating
ENEC	2014531.04	EN60730-1, EN60730-2-9 Thermal Cut-Out	13 (5) A 250Vac / 10.000 cycles
ENEC	2014531.04	EN60730-1, EN60730-2-22 Thermal Motor Protector	
UL / C-UL	E 15962	UL2111/CSA C22.2 No.77	

WARNINGS



RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product



Failure to follow these instructions can result in serious injury, or equipment damage.

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

Failure to follow these instructions will result in death or serious injury

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Americas

+1 (888) 438 2214
sensors@sensata.com

Europe, Middle East & Africa

+31 (74) 357 8156
temperature-info.eu
@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006
ext 2808