

# 9700 PROTECTOR

THERMAL PROTECTOR FOR MOTOR/FLUORESCENT BALLASTS AND TEMPERATURE SENSING CONTROLS



The Klixon® 9700 protector is a field proven miniature protector developed to protect shaded pole and permanent split capacitor motors, fluorescent ballasts, solenoids, transformers and other electrical equipment against overheating.

In addition to being small and lightweight, the unit is both temperature and current sensitive. Since the 9700 is sealed to withstand varnish dipping, it can be mounted directly in windings where it can best sense the true temperature of the electrical equipment. As a result, over-temperature protection is assured.

Since the case is not electrically insulated, the protector is furnished with a durable Mylar/HELD insulating sleeve. Shrinkable and non-shrinkable sleeves are available.


## TECHNICAL SPECIFICATIONS

<b>Purpose of the Control</b>	Thermal Motor Protector (TMP) Thermal Ballast Protector (TBP) Thermal Cut-Out (TCO)
<b>Contact Capacity</b>	250VAC 13A for TCO 250VAC 2A for TBP
<b>Temperature Range</b>	60°C to 150°C for TCO and TMP 60°C to 135°C for TBP
<b>Tolerance on Open Temp.</b>	+/- 5K or +/- 8K
<b>Automatic Action</b>	Type 3C for TMP Type 2C for TBP and TCO
<b>Operating Time</b>	Continuous
<b>Pollution Station</b>	Normal
<b>Extent of Sensing Element</b>	Whole Control
<b>PTI of the Insulation</b>	175
<b>Enclosure Protection Level</b>	IP00

# CURVES


## Ultimate trip current vs ambient temperature

Approx., to be used only for selecting samples for verification tests

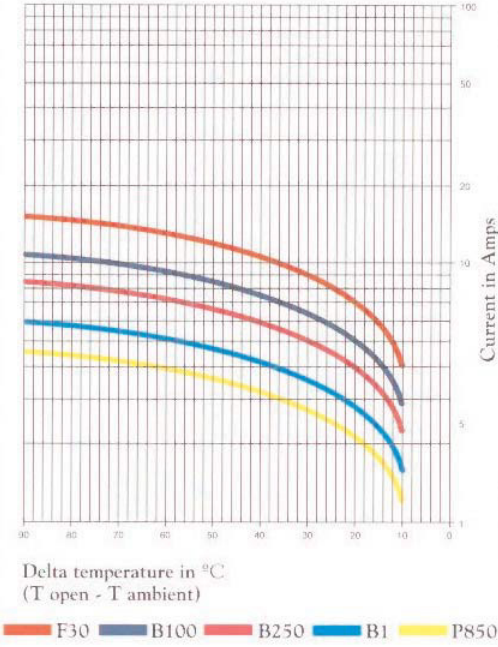


## Average first cycle tripping time vs current 25°C. ambient

Approx., to be used only for selecting samples for verification tests

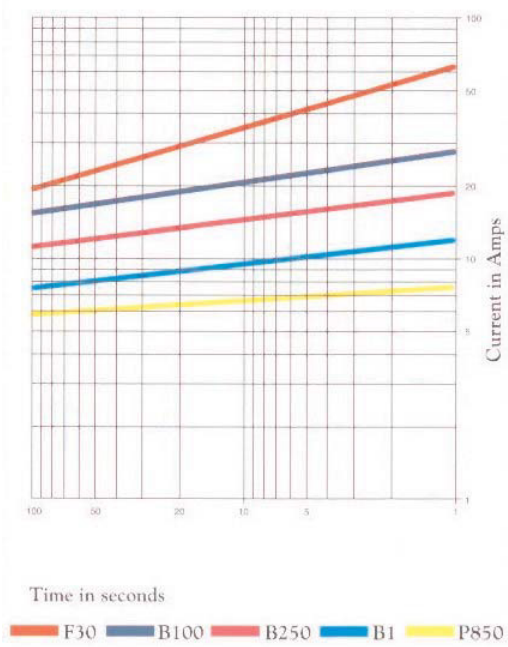

# DIMENSIONS

Dimensions in mm [Inch]

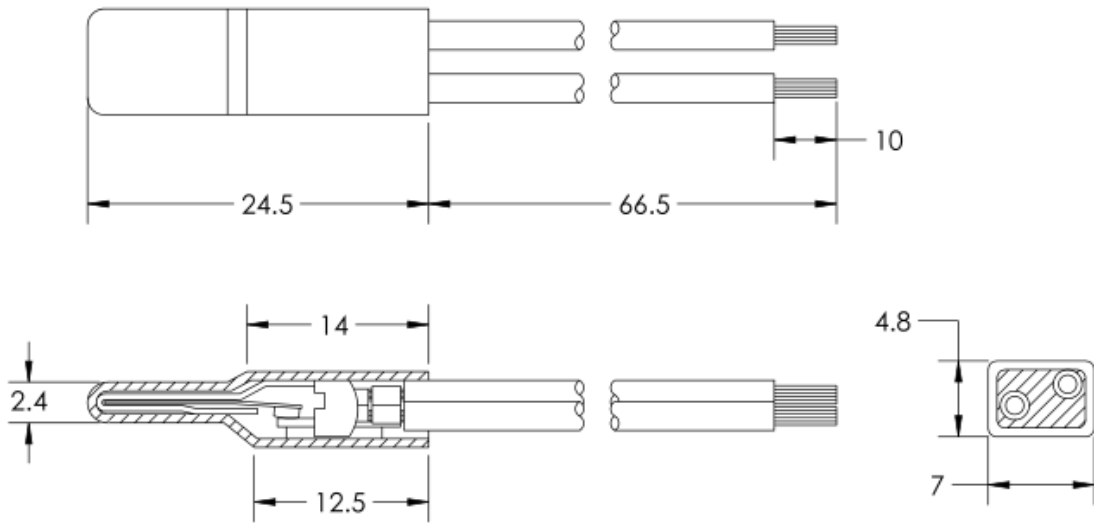

# ORDERING OPTIONS

Example : 9700K01-215

Bimetal of 30 ohms/cm<sup>2</sup>, 120°C Operating Temperature, ±5K Tolerance with AWG#18 (UL3343 125°C -600V), 66.7mm Length Leads, Thick 0.15mm, Dia. 6.9mm, Length 34mm, Mylar Sleeve.

9700 - X X YY - ZZZZ

**Device Identification**

9700

**Contact Material Combination**

Serial Number is assigned for each desired temperature and resistance rating.

Code	Stationary Contact	Movable Contact
K/H	Fine Sliver + Nickel Silver	Steel + Copper + AgNi

**Note:** We only provide H / K Type Devices. K type when new part number is defined and setup.

**Open Temperature Tolerance**

: ± 5K, 2: ±8K

**Operating Temperature and Actuation Disc Material**

Serial Number is assigned for each desired temperature and resistance rating.

Nominal Operating Temperature	Resistance of Actuation Disc(ohms.cm <sup>2</sup> )				
	30	250	850	100	475
	Temperature Code				
60	56	57	58	59	60
80	91	92	93	94	95
90	21	22	23	24	25
100	26	27	28	29	30
110	36	37	38	39	40
120	1	2	3	4	5
130	11	12	13	14	15
140	66	67	68	69	70
150	46	47	48	49	50

This is a typical temperature code. There is a temperature code at each 5°C in a step from 60 to 150°C

**Wire Lead and Sleeve**

Serial number is assigned for each lead and sleeve configuration, i.e. wire type, length, AWG#, stripped length, sleeve type, and length.

## AGENCY APPROVALS & CERTIFICATIONS



Agency	File Number	Standard	Note
UL	E 15962	UL2111	Motor Protector
ENEC	2014531.10	EN60730-2-9	Thermal Cut-out
ENEC	2014531.10	EN 60730-2-22	Thermal Motor Protector
ENEC	2014531.10	EN60730-2-3	Thermal Ballast Protector
CQC	CQC02002001344	GB14536.1,GB14536.3,GB14536.10	

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates (“Sensata”) are solely intended to assist third parties (“Buyers”) who are developing systems that incorporate Sensata products (also referred to herein as “components”). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer’s systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED “AS IS”. SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata’s terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com). SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS’ PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

### CONTACT US

#### Americas

+1 (508) 236-2551  
[electrical-protection-sales@sensata.com](mailto:electrical-protection-sales@sensata.com)

#### Europe, Middle East & Africa

+1 (760) 597 7042  
[motors-info.eu@sensata.com](mailto:motors-info.eu@sensata.com)

#### Asia Pacific

[sales.isasia@list.sensata.com](mailto:sales.isasia@list.sensata.com)  
 China +86 (21) 2306 1500  
 Japan +81 (45) 277 7117  
 Korea +82 (31) 601 2004  
 India +91 (80) 67920890  
 Rest of Asia +886 (2) 27602006  
 ext 2808